

# MV-ID2013EM

## 1.3 MP Industrial Code Reader



### Introduction

MV-ID2013EM industrial code reader can read different types of 1D and 2D codes, and its max. reading speed reaches 30 codes/sec. It adopts deep learning algorithm to process images with good robustness, and can recognize various codes.

### Key Feature

- Built-in deep learning algorithm to read codes with good robustness.
- Compact design and small in size.
- Adopts multiple IO interfaces and plug-in power interface.
- Adopts LED aiming light to help aim codes.
- Adopts buzzer and indicator for indicating device status.
- Supports one-click parameter adjustment for convenient operation.

### Available Model

- MV-ID2013EM-05-WBN
- MV-ID2013EM-05-WBP
- MV-ID2013EM-05-RBN
- MV-ID2013EM-05-RBP
- MV-ID2013EM-05-WBN-U
- MV-ID2013EM-05-WBP-U
- MV-ID2013EM-05-RBN-U
- MV-ID2013EM-05-RBP-U
- MV-ID2013EM-05H-RBN
- MV-ID2013EM-05H-RBN-U
- MV-ID2013EM-05H-RBP
- MV-ID2013EM-05H-RBP-U
- MV-ID2013EM-05N-RBN
- MV-ID2013EM-05N-RBN-U
- MV-ID2013EM-05N-RBP
- MV-ID2013EM-05N-RBP-U
- MV-ID2013EM-03N-RBP
- MV-ID2013EM-03N-RBN

### Applicable Industry

Consumer electronics, household appliances, food and beverage, pharmaceutical, automobile parts, ticket checking machine, etc.

## Specification

Model	MV-ID2013EM-05-WBN(-U)	MV-ID2013EM-05-WBP(-U)	MV-ID2013EM-05-RBN(-U)	MV-ID2013EM-05-RBP(-U)
<b>Performance</b>				
<b>Symbologies</b>	1D codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE			
	2D codes: QR Code, Data Matrix			
<b>Max. frame rate</b>	50 fps			
<b>Max. reading speed</b>	30 codes/sec			
<b>Sensor type</b>	CMOS, global shutter			
<b>Pixel size</b>	2.7 $\mu\text{m}$ $\times$ 2.7 $\mu\text{m}$			
<b>Sensor size</b>	1/4"			
<b>Resolution</b>	1280 $\times$ 1024			
<b>Exposure time</b>	60 $\mu\text{s}$ to 0.6 sec			
<b>Gain</b>	1 dB to 28 dB			
<b>Mono/color</b>	Mono			
<b>Communication protocol</b>	Device with network interface: SmartSDK, TCP Client, Serial, FTP, TCP Server, UDP, Profinet, Ethernet/IP			
	Device with USB interface: SmartSDK, USB (HID, CDC)			
<b>Depth of field*</b>	Code 39 (5 mil): 75 mm to 215 mm Code 128 (10 mil): 50 mm to 400 mm EAN 13 (13 mil): 60 mm to 420 mm QR Code (15 mil): 40 mm to 290 mm Data Matrix (10 mil): 50 mm to 240 mm			
<b>Optics</b>				
<b>Focal length</b>	4.7 mm			
<b>Ambient illumination</b>	0 lux to 10000 lux			
<b>Light source</b>	White	White (polarized)	Red	Red (polarized)
<b>Aiming system</b>	Green LED			
<b>Electrical feature</b>				
<b>Data interface</b>	Device with network interface: Fast Ethernet, RS-232, DC terminal			
	Device with USB interface: USB2.0			
<b>Digital I/O</b>	Device with network interface: DB15 connector provides power and I/O, including none-isolated input $\times$ 2 (Line 0/1), none-isolated output $\times$ 2 (Line 2/3), RS-232 $\times$ 1. Device trigger via pressing trigger button supported.			
	Device with USB interface: DB15 connector provides data transmission. Device trigger via pressing trigger button supported.			
<b>Power supply</b>	Device with network interface: 12 VDC to 24 VDC			
	Device with USB interface: 5 VDC (USB2.0 provides power supply)			
<b>Max. power consumption</b>	Device with network interface: 2.5 W@12 VDC			
	Device with USB interface: 2.5 W@5 VDC (USB2.0 provides power supply)			

<b>Mechanical</b>	
<b>Lens mount</b>	M5.8-mount
<b>Indicator</b>	Power indicator (POWER), status indicator (OK/NG)
<b>Dimension</b>	45 mm × 43 mm × 25 mm (1.8" × 1.7" × 1.0")
<b>Weight</b>	Approx. 68.5 g (0.15 lb.)
<b>Ingress protection</b>	IP54
<b>Temperature</b>	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
<b>Humidity</b>	20% to 95% RH, non-condensing
<b>General</b>	
<b>Client software</b>	IDMVS
<b>Certification</b>	CE, RoHS, KC

\*Test condition: Environment temperature=25 °C (77 °F), ambient illumination=250 lux filament lamp, sample symbologies are used.

Model	MV-ID2013EM-05H-RBN(-U)	MV-ID2013EM-05H-RBP(-U)	MV-ID2013EM-05N-RBN(-U)	MV-ID2013EM-05N-RBP(-U)
<b>Performance</b>				
<b>Symbologies</b>	1D codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE 2D codes: QR Code, Data Matrix			
<b>Max. frame rate</b>	50 fps			
<b>Max. reading speed</b>	30 codes/sec			
<b>Sensor type</b>	CMOS, global shutter			
<b>Pixel size</b>	2.7 μm × 2.7 μm			
<b>Sensor size</b>	1/4"			
<b>Resolution</b>	1280 × 1024			
<b>Exposure time</b>	60 μs to 0.6 sec			
<b>Gain</b>	1 dB to 28 dB			
<b>Mono/color</b>	Mono			
<b>Communication protocol</b>	Device with network interface: SmartSDK, TCP Client, Serial, FTP, TCP Server, UDP, Profinet, Ethernet/IP Device with USB interface: SmartSDK, USB (HID, CDC)			
<b>Depth of field*</b>	Code 39 (3 mil): 35 mm to 65 mm Code 39 (5 mil): 30 mm to 75 mm EAN 13 (13 mil): 55 mm to 105 mm Data Matrix (5 mil): 30 mm to 65 mm Data Matrix (10 mil): 25 mm to 90 mm Code 128 (10 mil): 25 mm to 105 mm QR Code (10 mil): 25 mm to 95 mm		Code 39 (3 mil): 45 mm to 90 mm Code 39 (5 mil): 35 mm to 105 mm EAN 13 (13 mil): 50 mm to 125 mm Data Matrix (5 mil): 40 mm to 80 mm Data Matrix (10 mil): 25 mm to 125 mm Code 128 (10 mil): 40 mm to 140 mm QR Code (10 mil): 30 mm to 120 mm	



<b>Optics</b>				
<b>Focal length</b>	4.7 mm			
<b>Ambient illumination</b>	0 lux to 10000 lux			
<b>Light source</b>	Red	Red (polarized)	Red	Red (polarized)
<b>Aiming system</b>	Green LED			
<b>Electrical feature</b>				
<b>Data interface</b>	Device with network interface: Fast Ethernet, RS-232, DC terminal			
	Device with USB interface: USB2.0			
<b>Digital I/O</b>	Device with network interface: DB15 connector provides power and I/O, including none-isolated input × 2 (Line 0/1), none-isolated output × 2 (Line 2/3), RS-232 × 1. Device trigger via pressing trigger button supported.			
	Device with USB interface: DB15 connector provides data transmission. Device trigger via pressing trigger button supported.			
<b>Power supply</b>	Device with network interface: 12 VDC to 24 VDC			
	Device with USB interface: 5 VDC (USB2.0 provides power supply)			
<b>Max. power consumption</b>	Device with network interface: 2.5 W@12 VDC			
	Device with USB interface: 2.5 W@5 VDC (USB2.0 provides power supply)			
<b>Mechanical</b>				
<b>Lens mount</b>	M5.8-mount			
<b>Indicator</b>	Power indicator (POWER), status indicator (OK/NG)			
<b>Dimension</b>	45 mm × 43 mm × 25 mm (1.8" × 1.7" × 1.0")			
<b>Weight</b>	Approx. 68.5 g (0.15 lb.)			
<b>Ingress protection</b>	IP54			
<b>Temperature</b>	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)			
<b>Humidity</b>	20% to 95% RH, non-condensing			
<b>General</b>				
<b>Client software</b>	IDMVS			
<b>Certification</b>	CE, RoHS, KC			

\*Test condition: Environment temperature=25 °C (77 °F), ambient illumination=250 lux filament lamp, sample symbologies are used.

Model	MV-ID2013EM-03N-RBN	MV-ID2013EM-03N-RBP
<b>Performance</b>		
<b>Symbologies</b>	1D codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE	
	2D codes: QR Code, Data Matrix	
<b>Max. frame rate</b>	50 fps	
<b>Max. reading speed</b>	30 codes/sec	
<b>Sensor type</b>	CMOS, global shutter	
<b>Pixel size</b>	2.7 $\mu\text{m}$ $\times$ 2.7 $\mu\text{m}$	
<b>Sensor size</b>	1/4"	
<b>Resolution</b>	1280 $\times$ 1024	
<b>Exposure time</b>	60 $\mu\text{s}$ to 0.6 sec	
<b>Gain</b>	1 dB to 28 dB	
<b>Mono/color</b>	Mono	
<b>Communication protocol</b>	SmartSDK, TCP Client, Serial, FTP, TCP Server, UDP, Profinet, Ethernet/IP	
<b>Depth of field*</b>	Code 39 (5 mil): 40 mm to 120 mm Code 128 (10 mil): 15 mm to 250 mm EAN 13 (13 mil): 30 mm to 280 mm QR Code (10 mil): 35 mm to 155 mm QR Code (15 mil): 15 mm to 215 mm QR Code (20 mil): 15 mm to 270 mm	
<b>Optics</b>		
<b>Focal length</b>	2.45 mm	
<b>Ambient illumination</b>	0 lux to 10000 lux	
<b>Light source</b>	Red	Red (polarized)
<b>Aiming system</b>	Green LED	
<b>Electrical feature</b>		
<b>Data interface</b>	Fast Ethernet, RS-232, DC terminal	
<b>Digital I/O</b>	DB15 connector provides power and I/O, including none-isolated input $\times$ 2 (Line 0/1), none-isolated output $\times$ 2 (Line 2/3), RS-232 $\times$ 1. Device trigger via pressing trigger button supported.	
<b>Power supply</b>	12 VDC to 24 VDC	
<b>Max. power consumption</b>	2.5 W@12 VDC	
<b>Mechanical</b>		
<b>Lens mount</b>	M5.4-mount	
<b>Indicator</b>	Power indicator (POWER), status indicator (OK/NG)	
<b>Dimension</b>	45 mm $\times$ 43 mm $\times$ 25 mm (1.8" $\times$ 1.7" $\times$ 1.0")	
<b>Weight</b>	Approx. 68.5 g (0.15 lb.)	
<b>Ingress protection</b>	IP54	
<b>Temperature</b>	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$ ) storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$ )	
<b>Humidity</b>	20% to 95% RH, non-condensing	
<b>General</b>		
<b>Client software</b>	IDMVS	
<b>Certification</b>	CE, RoHS, KC	

\*Test condition: Environment temperature=25  $^{\circ}\text{C}$  (77  $^{\circ}\text{F}$ ), ambient illumination=250 lux filament lamp, sample symbologies are used.

## Dimension

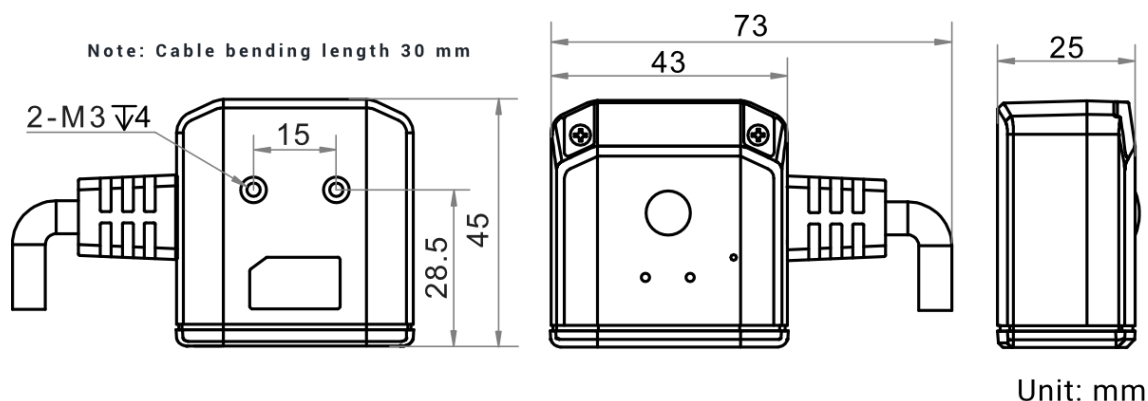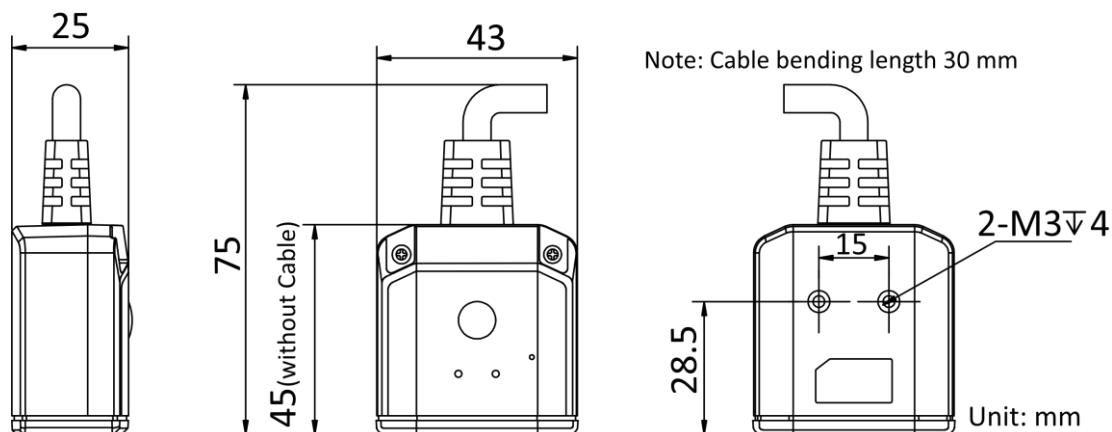

## Detection Range

Focal Length (mm)	Working Distance (mm)	Field of View		1D Min. Resolution (mm)*	2D Min. Resolution (mm) $\Delta$
		H (mm)	V (mm)		
2.45	120	163	130	0.12	0.29
4.7	120	89	72	0.07	0.278

## Note

- 1D Min. Resolution (mm)\*: Field of view (long side) / resolution (long side)  $\times$  number of pixels in the minimum bar width (number of pixels in the minimum bar width = 1)
- 2D Min. Resolution (mm) $\Delta$ : Field of view (long side) / resolution (long side)  $\times$  number of pixels in the side length of minimum module unit (number of pixels in the side length of minimum module unit = 3)
- The integrated cable of the device is a static cable by default that cannot be used in moving scene, such as drag chain. Therefore, it is recommended to fix the cable during installation.